





0519-67898510
0519-67898519
desk@czkaidi.cn
www.czkaidi.cn

2

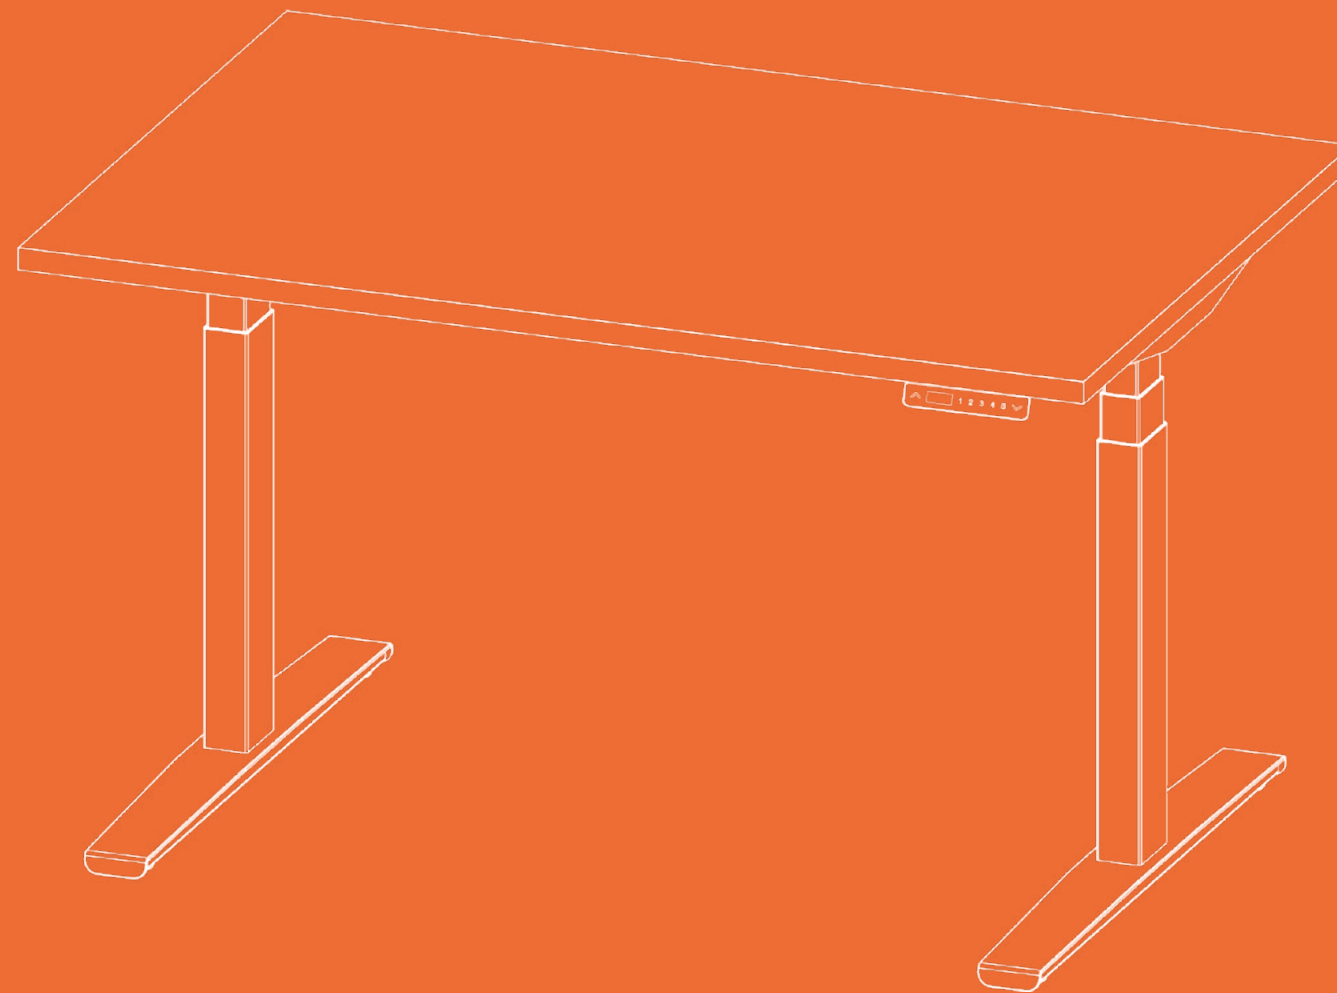

KD KAI DI
凯迪电器
605288



2600+

260+

12+

25+

50+



... ..



欧洲

- 斯托尔扎瑙 (德国)
- 慕尼黑 (德国)
- 哥德堡 (瑞典)
- 维尔纽斯 (立陶宛)
- 新松奇 (波兰)

亚太

- 常州·总部 (中国)
- 广州 (中国)
- 东京 (日本)
- 平阳 (越南)
- 班加罗尔 (印度)

北美

- 密歇根州 (美国)
- 密西西比州 (美国)

8

14₃

12.8

21

19% ①



6

200

②


9

60%

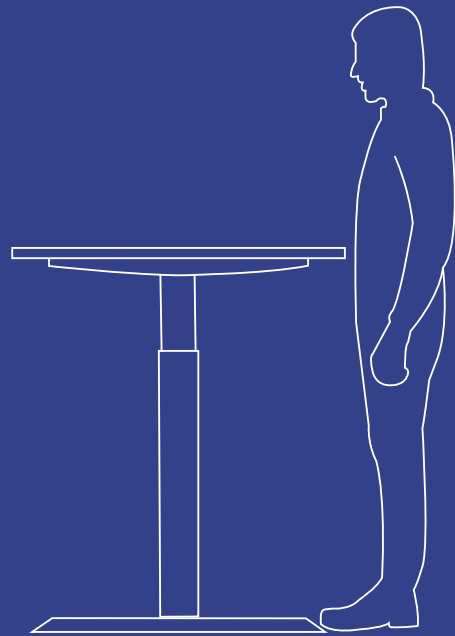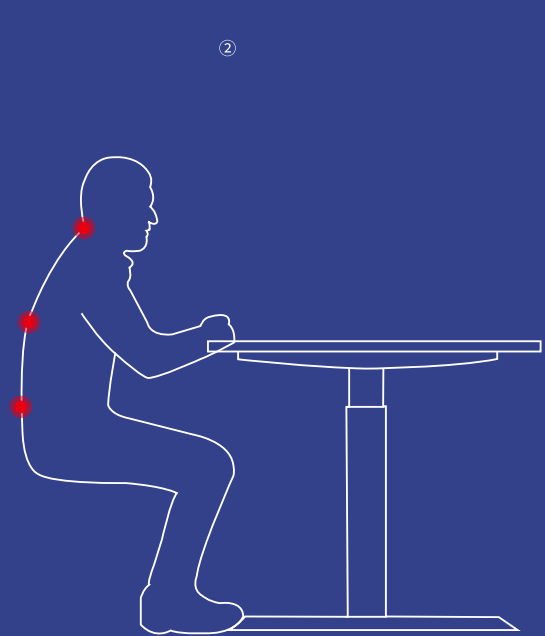

① 2018 6 29

② 2002

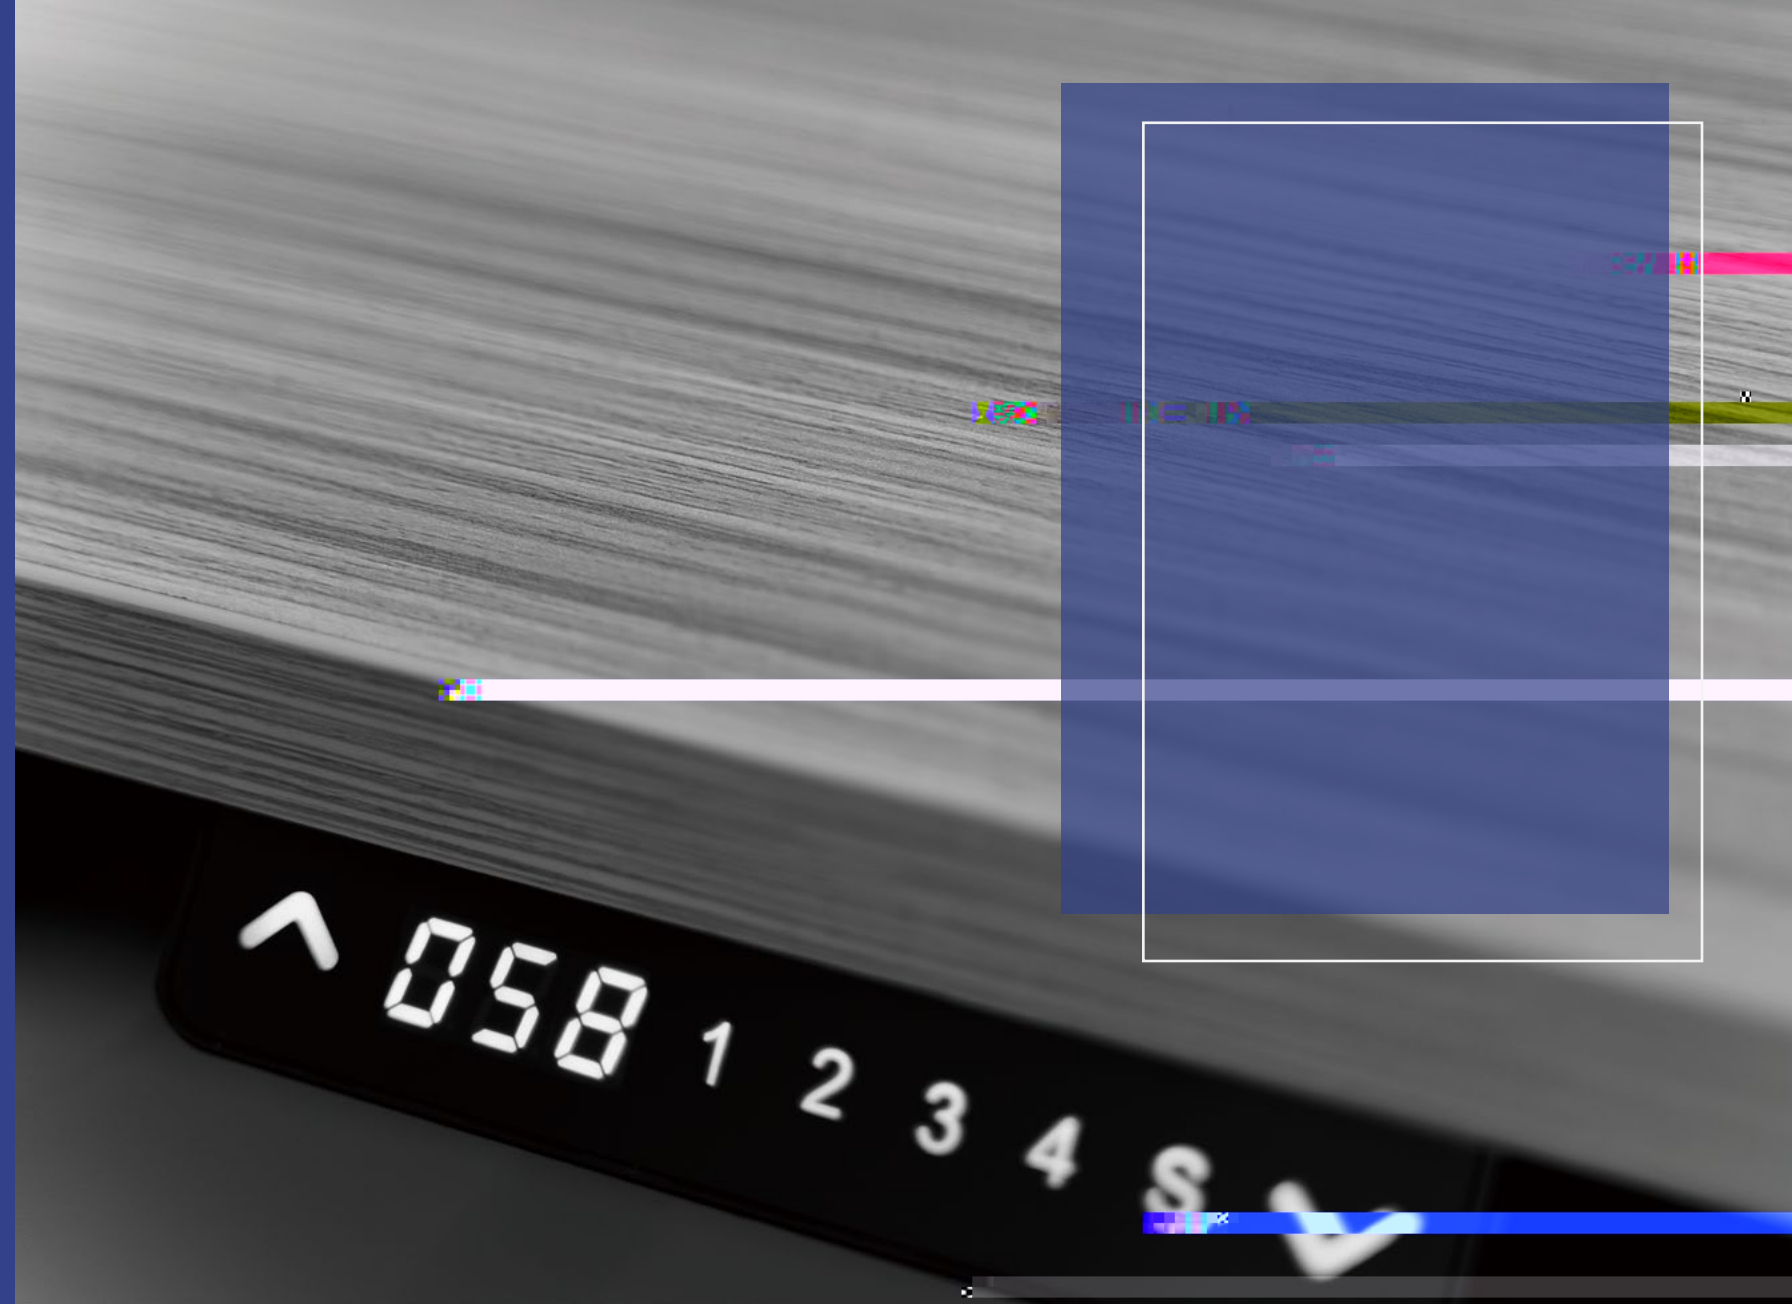



Sole
P07-10



Dual
P11-14



Variable
P15-18



Agile
P19-22



Trio
P23-26



P29-30



P31-32



N11+12



P35-36



P37-38


P01

P05

P27

P39

App

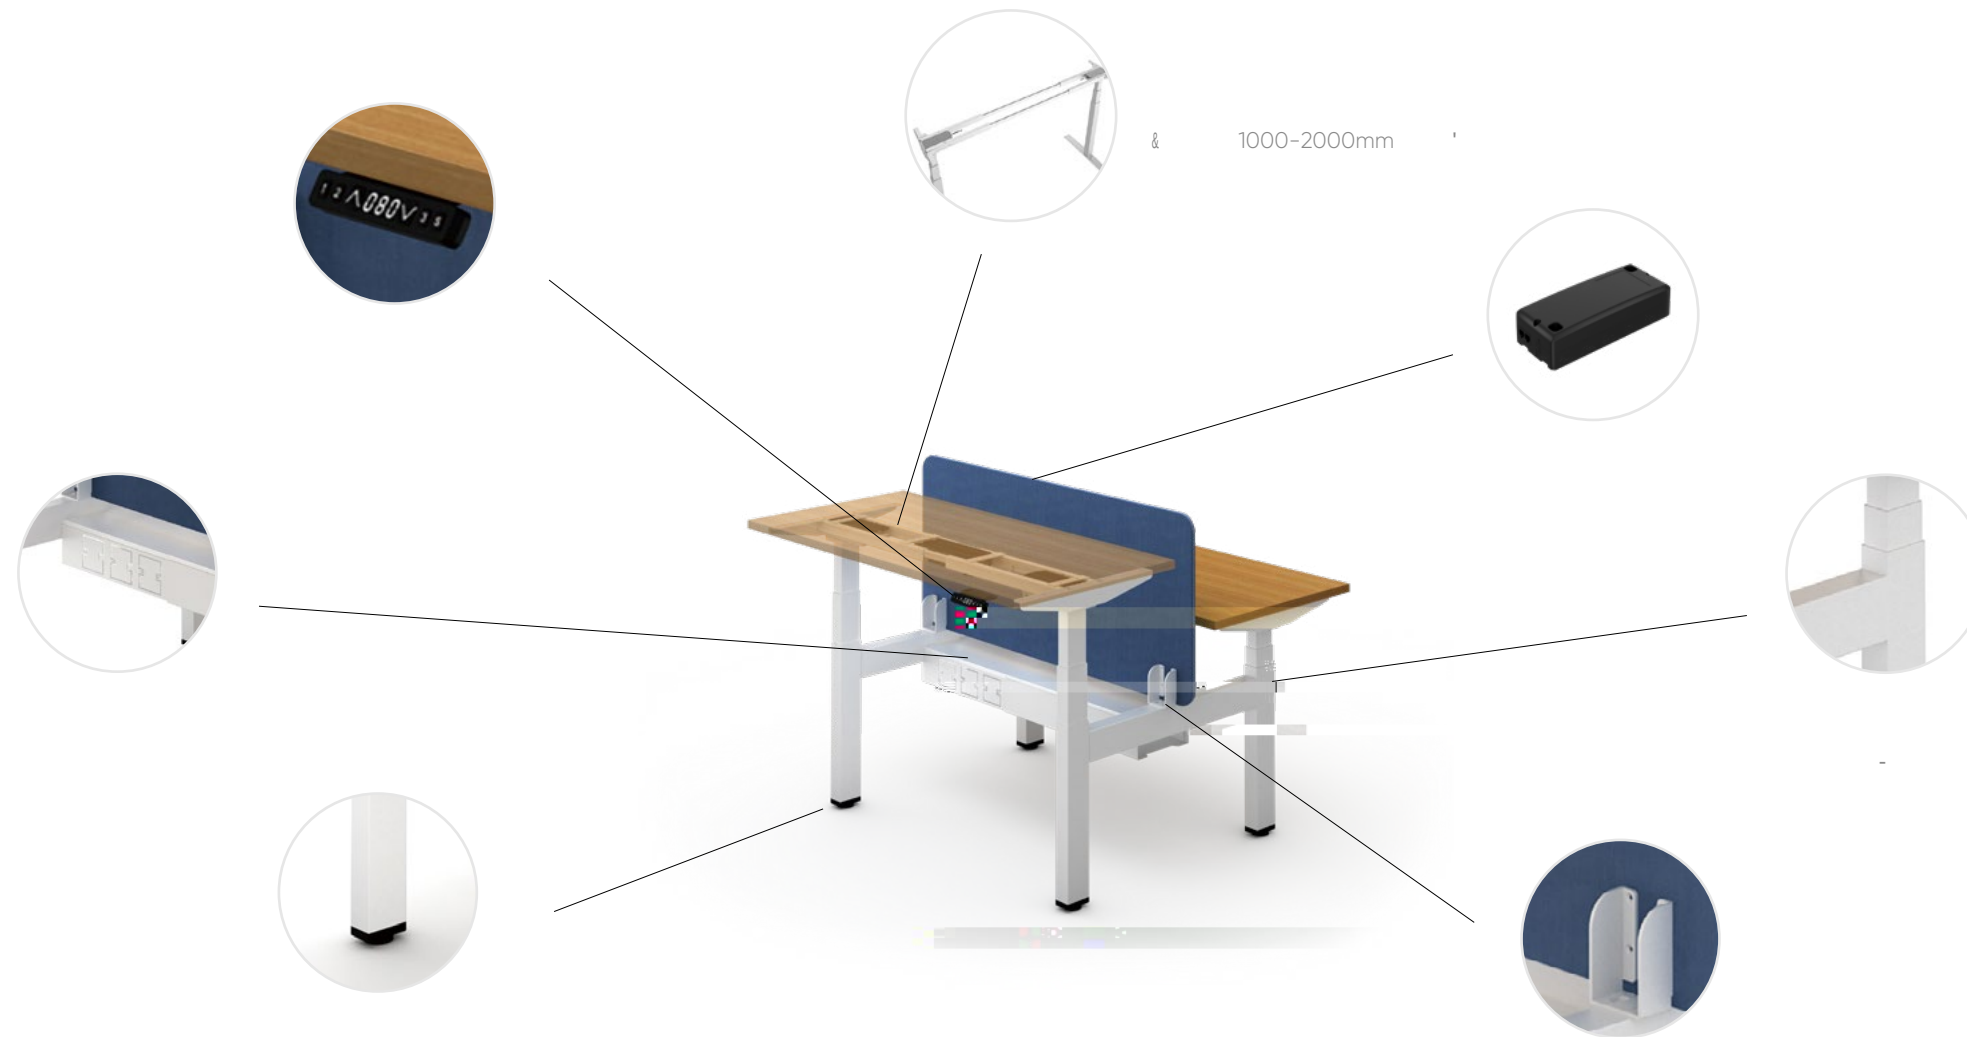




50%

3

&

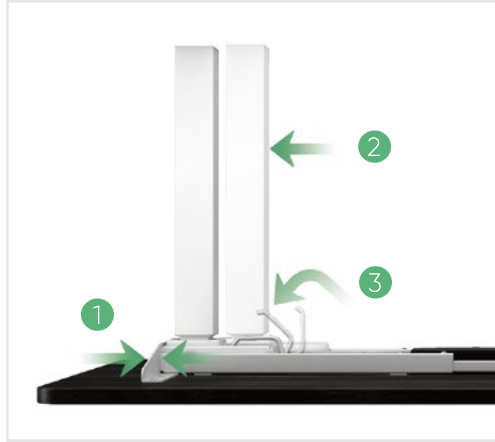


1






2

3



Z

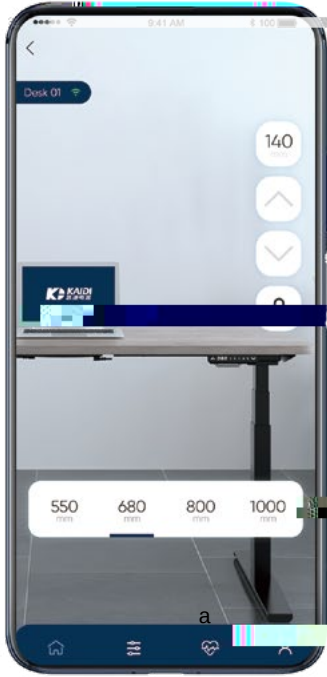

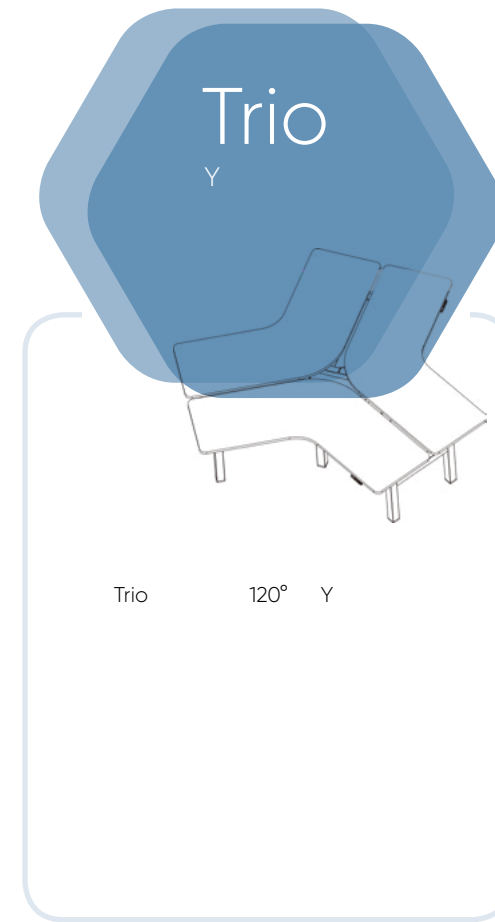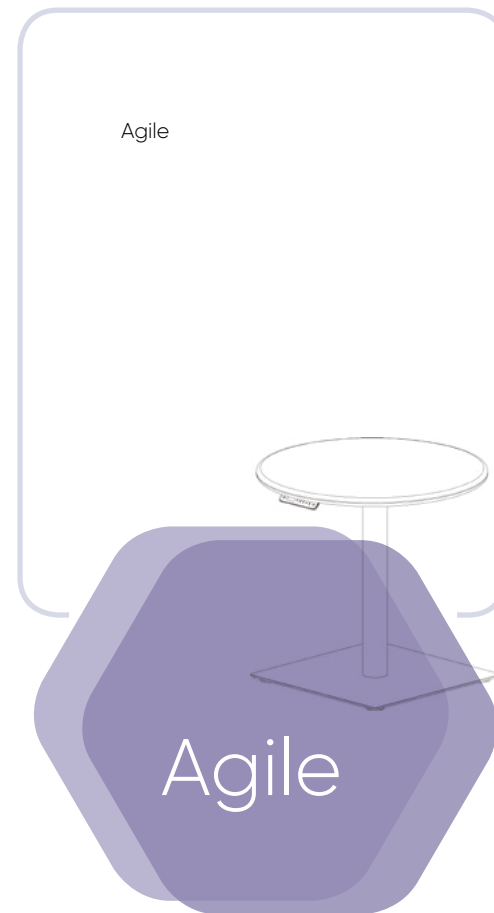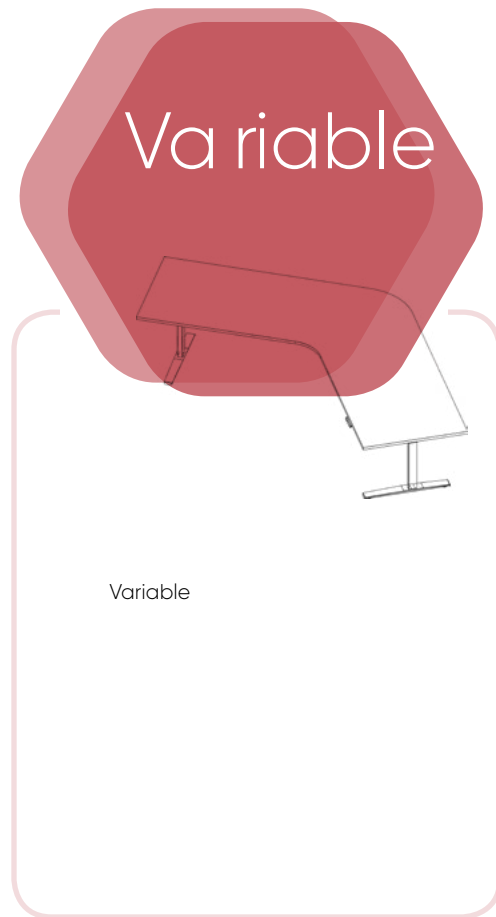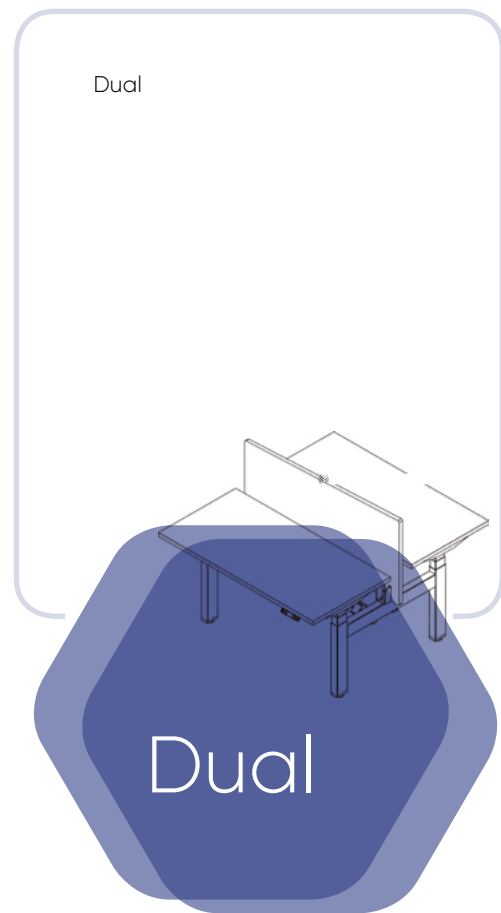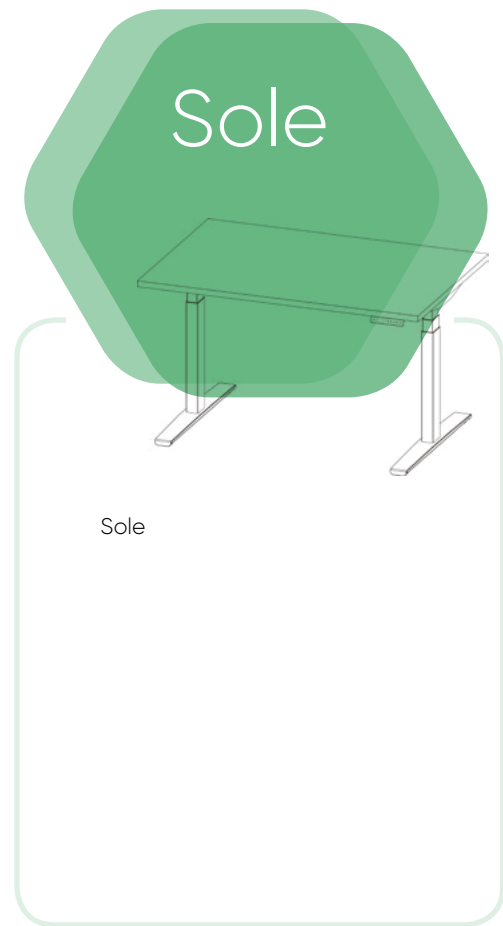





“

Sole

”

Sole



3




50×80mm



KDH206

LED

Dual

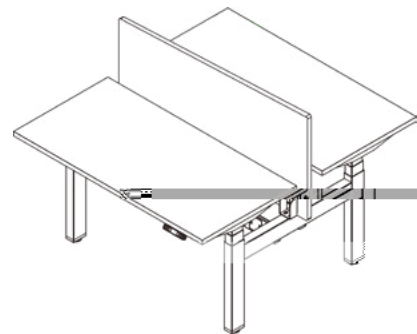

Dual

Dual



P11-12




“

Dual


”



064
3



Variable

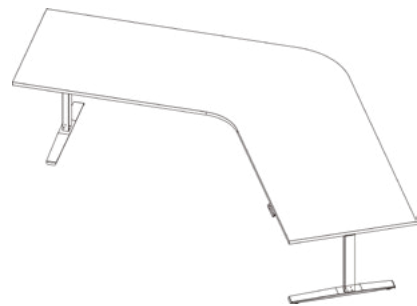

Variable



1-2

Variable





“

Variable

120°

2

”

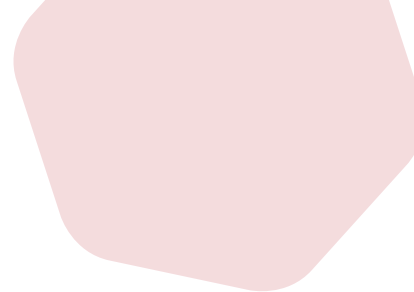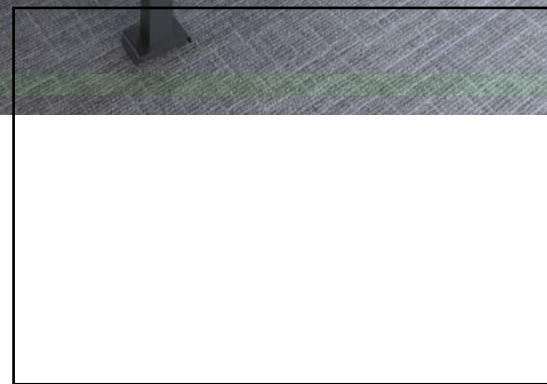

120°



170B

LED



App

4



KDF005

738*80*37.5mm

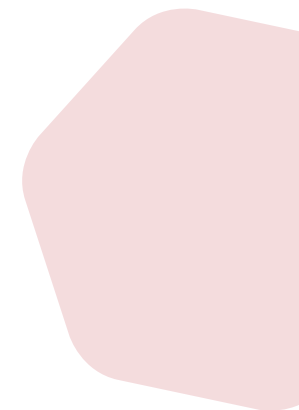

P17-18

Agile



Agile




5-10

Agile

“ Agile ”

”



KDH126




Trio

Y





Trio

120° Y

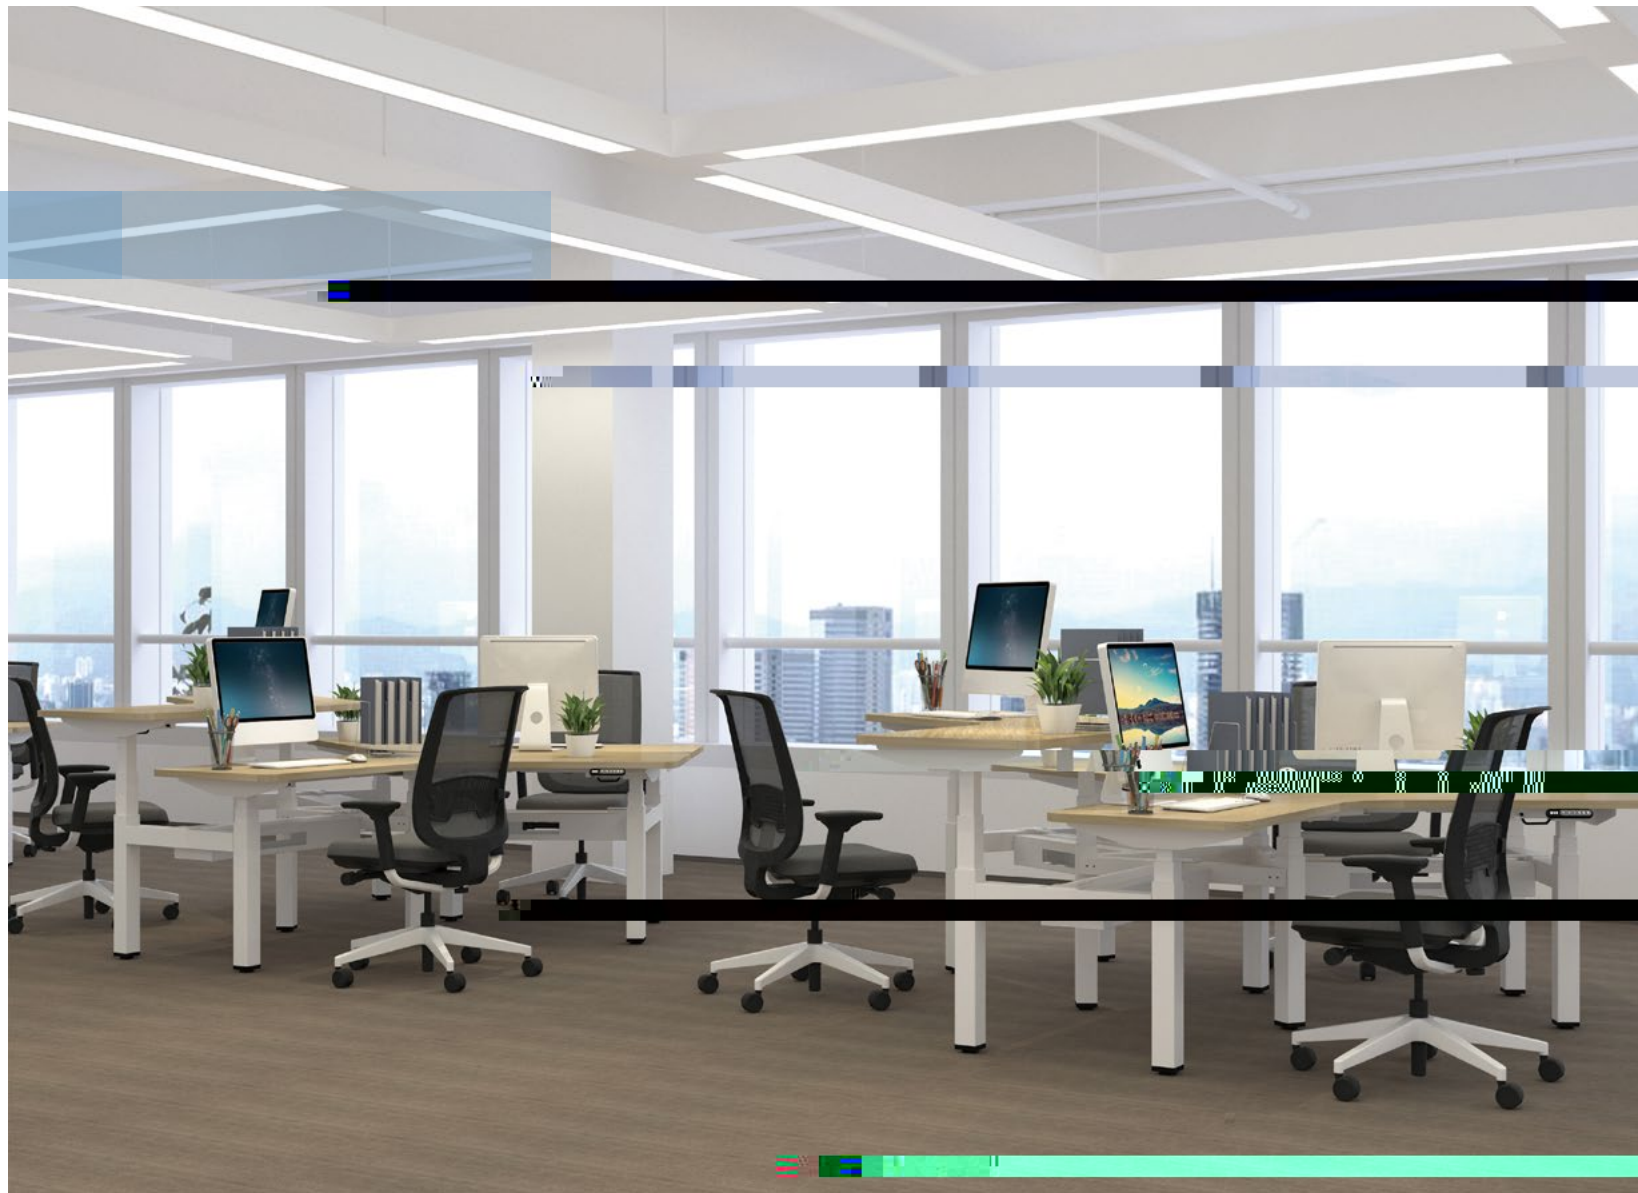

=
Trio

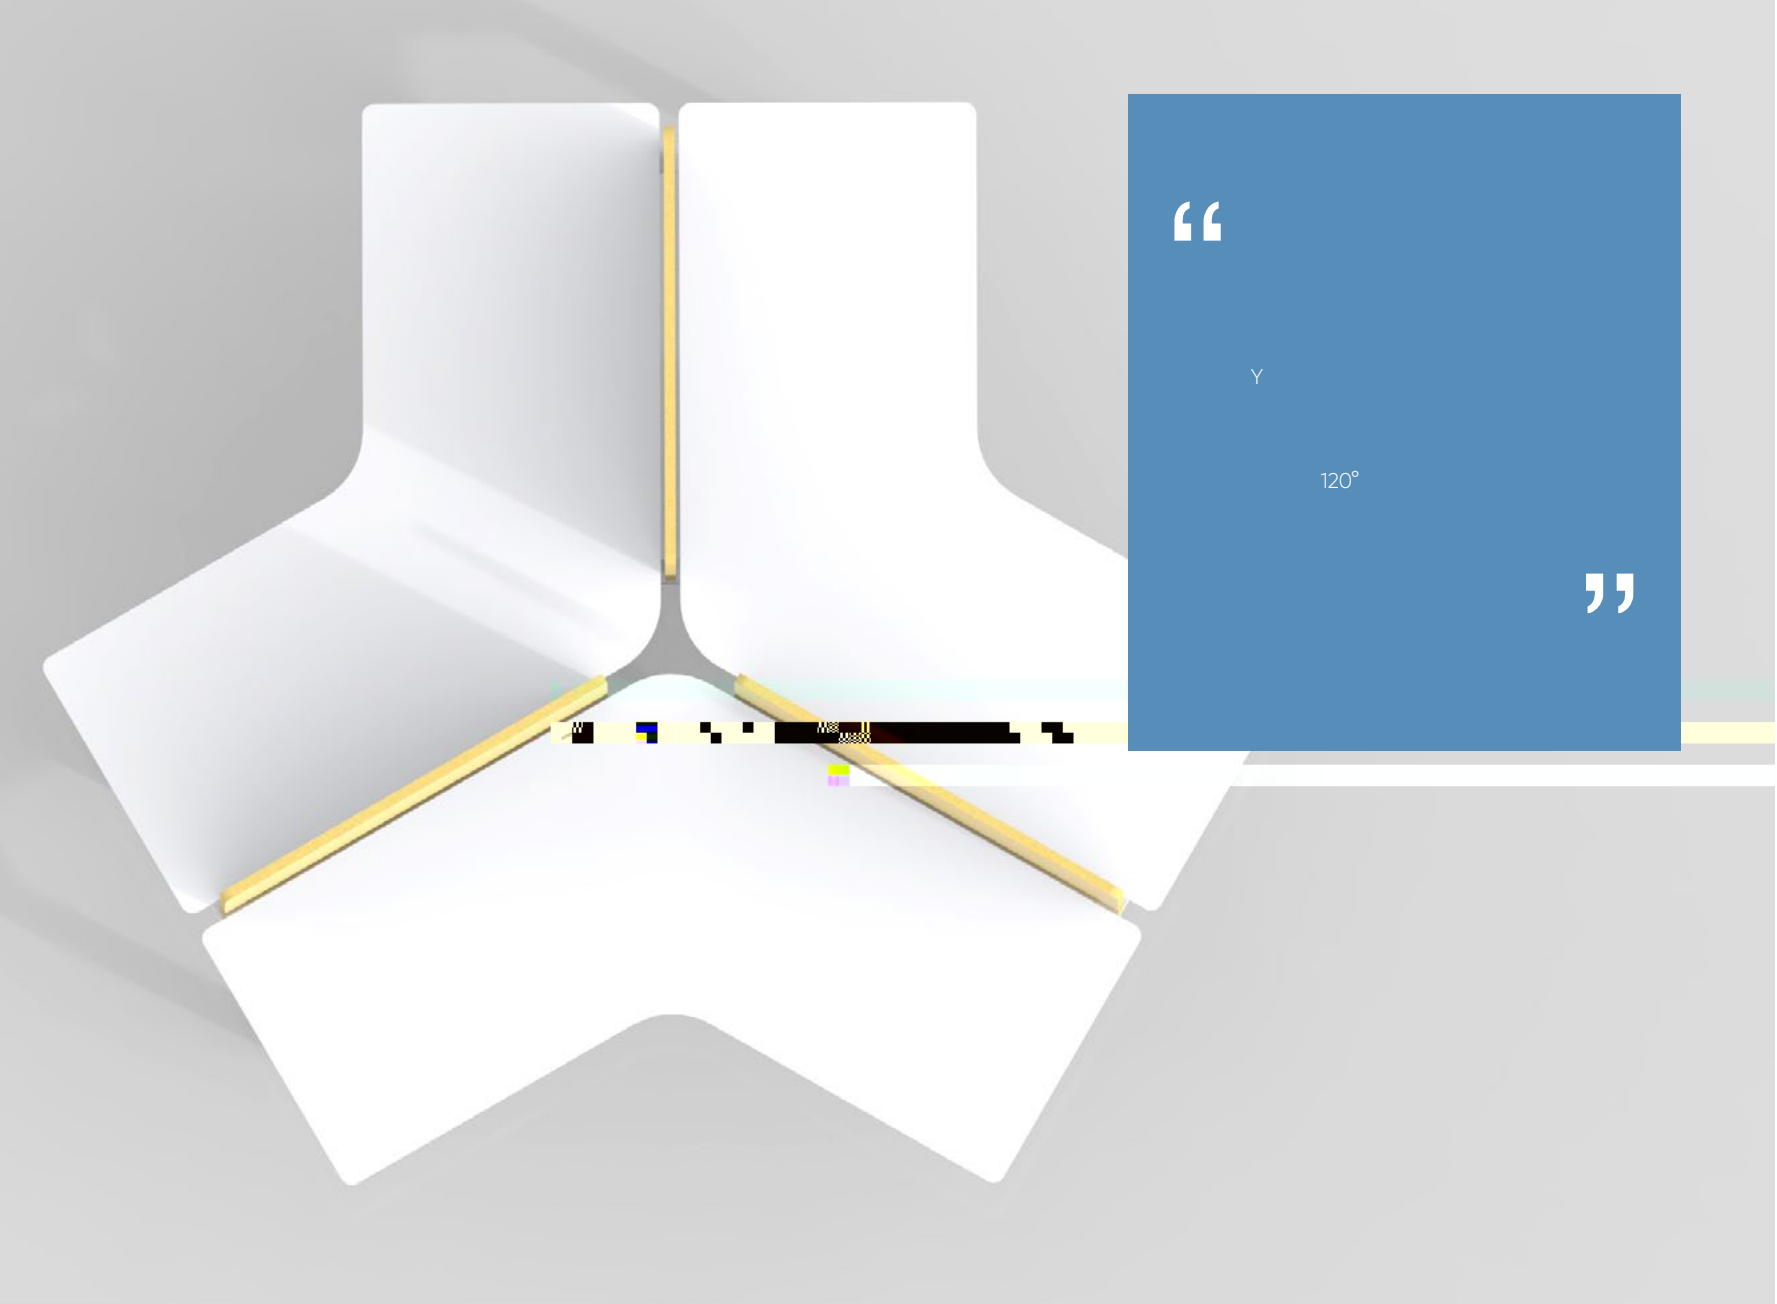

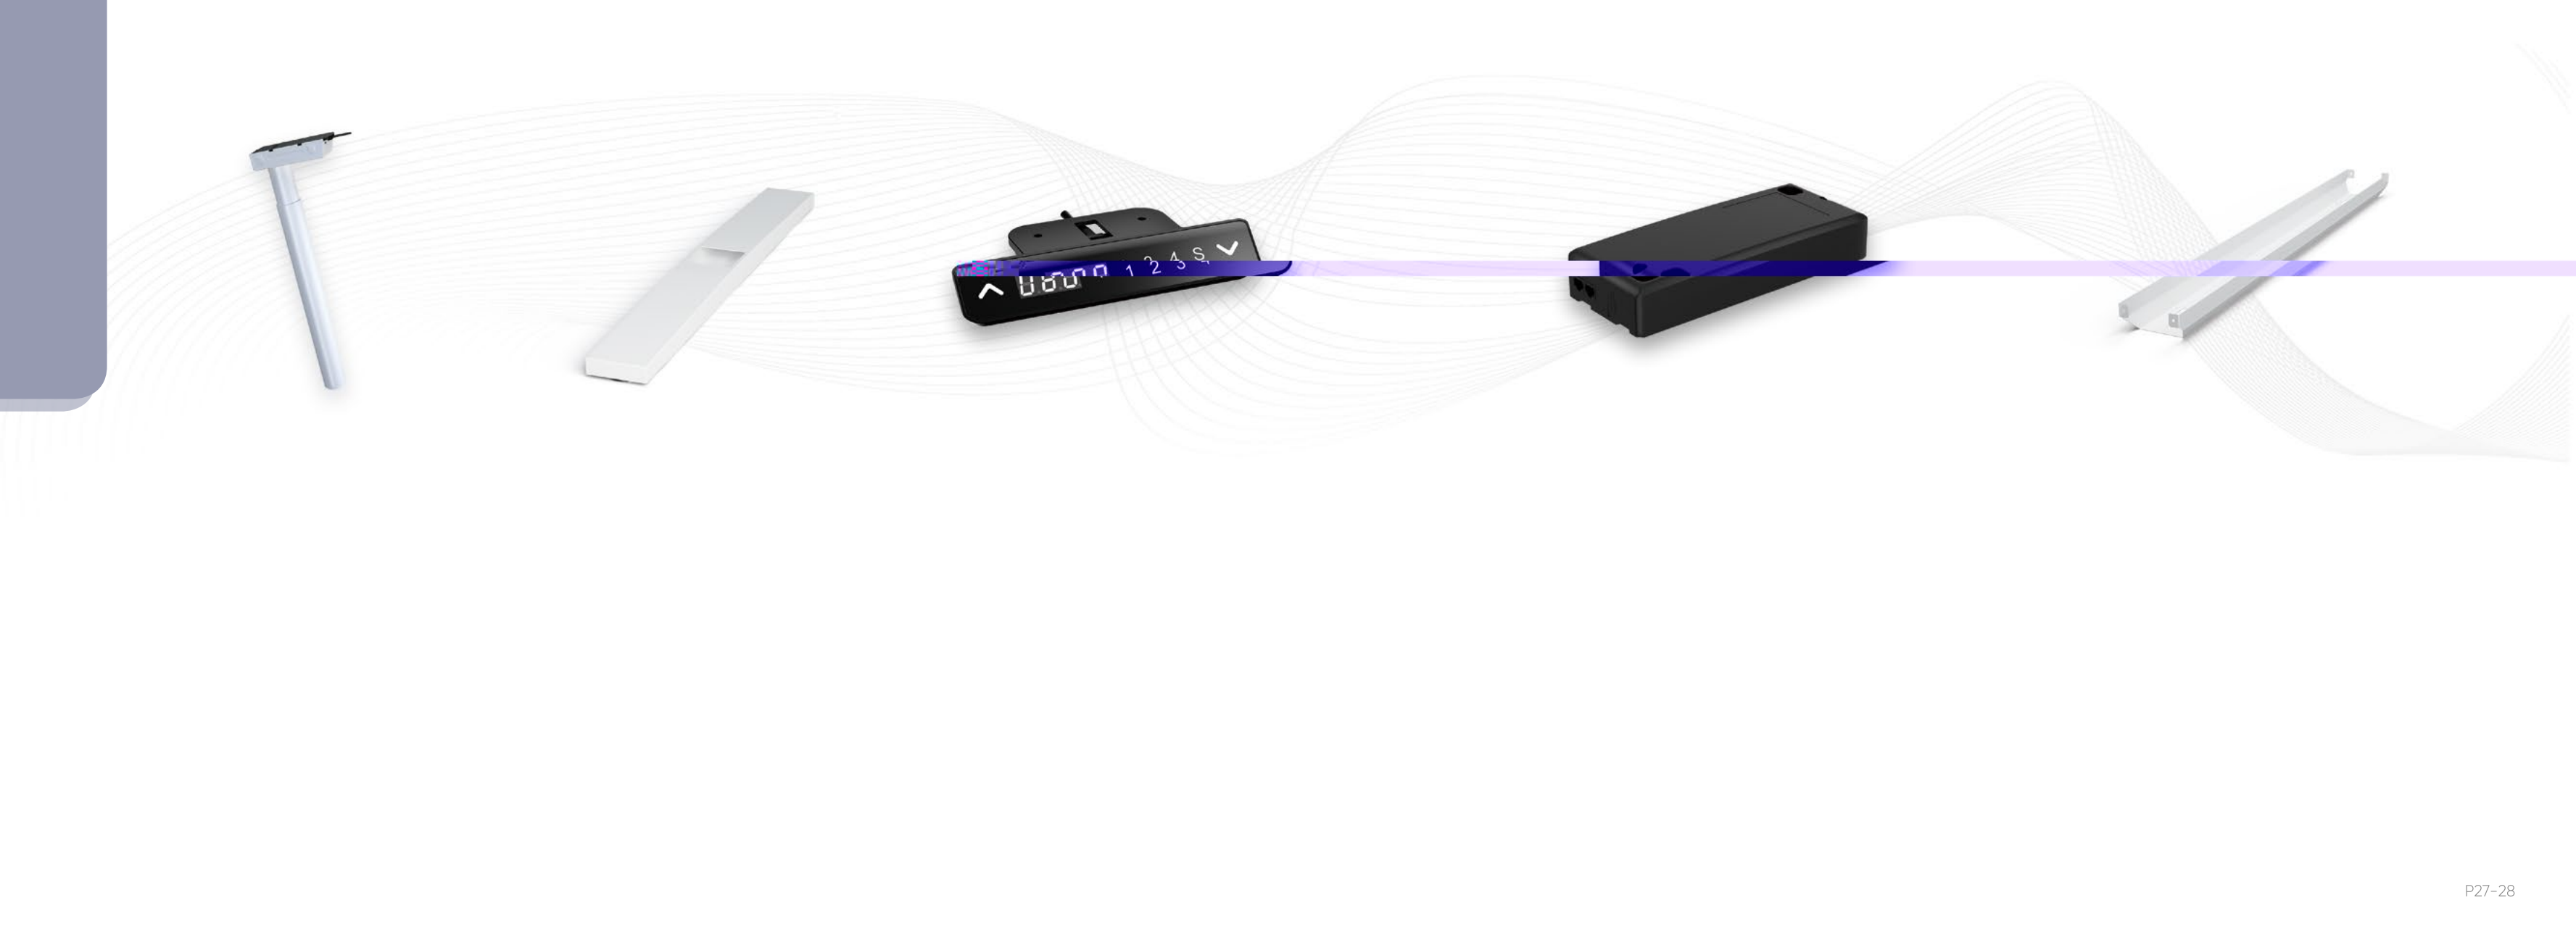

桌腿



碳素钢材




稳定承重



静音降噪



快速升降
最高达80mm/秒

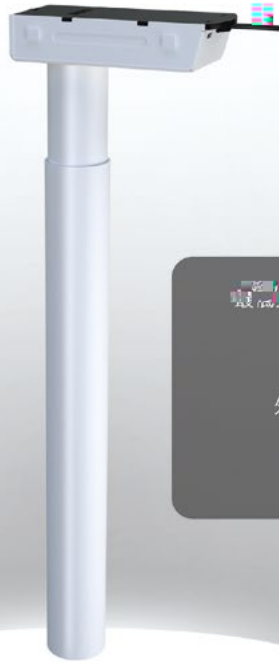


KDZT003A

行程	440 mm
速度	36 mm/s
外管尺寸	φ70 mm
载重	800 N
特点	两节/圆管/快装




KDZT005E

580 mm
650 mm
36 mm / S
φ 70 mm
800 N




KDZT017B-2

650/662 mm
440/500 mm
36 mm/s
95*60 mm
800 N




KDZT026

662 mm
500 mm
36 mm/s
80*50 mm
800 N



KDZT020

580/536 mm
650/663 mm
36 mm/s
95*60 mm
800 N



KDZT024A

580/536 mm
650/663 mm
36 mm/s
80*50 mm
800 N



KDZT035A

650/662 mm
440/500 mm
36 mm/s
69*69 mm
800 N



KDZT041A

580/536 mm
650/663 mm
36 mm/s
69*69 mm
800 N



脚板 (带地脚螺钉)



扎实稳定



细节精致



无惧倾斜



款式多样



KDF004

长度 738 mm
宽度 82.4 mm
高度 33 mm
特点 下沉式脚板/可配方管桌腿



KDF005

178 mm/610 mm/762 mm
80 mm
37.5 mm



KDF006C

178 mm/609 mm/762 mm
80 mm
29.5 mm
3.5mm



KDF006D

178 mm/610 mm/762 mm
92 mm
29.5 mm
3.5mm



KDF027

732 mm
70 mm
34.7 mm



KDF019

500 mm
500 mm
18.5 mm



KDF007

69 mm
69 mm
25 mm



KDF009

95 mm
60 mm
25 mm



KDF010

46 mm
46 mm
16.5 mm



KDF012

φ 70 mm
25 mm





Sole Dual Veele



控制盒



集成中枢




超低能耗



过流保护




防夹功能

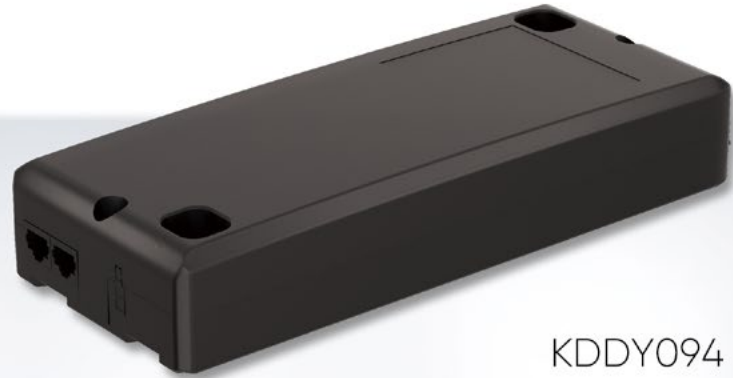

KDDY094

- 输入 100~240VAC , 400W
- 低待机功耗 (≤0.3W)
- 支持电机过流保护功能、防夹功能
- 支持同时驱动 **2** 支桌腿
- 推荐搭配 Sole Dual



KDDY096

230VAC 300W
≤ 0.1W



2

Sole Dual



KDDY099

100~240VAC 450W
≤ 0.3W



3

Variable Trio



KDDY104

29VDC 240W



≤ 0.1W

3

1-2

Agile Sole



KDDY106

100~240VAC, 500W
≤ 0.5W



4 支



KDBC02

U_g

线材收纳系统



功能强大




组装便捷



高效收纳



高性价比

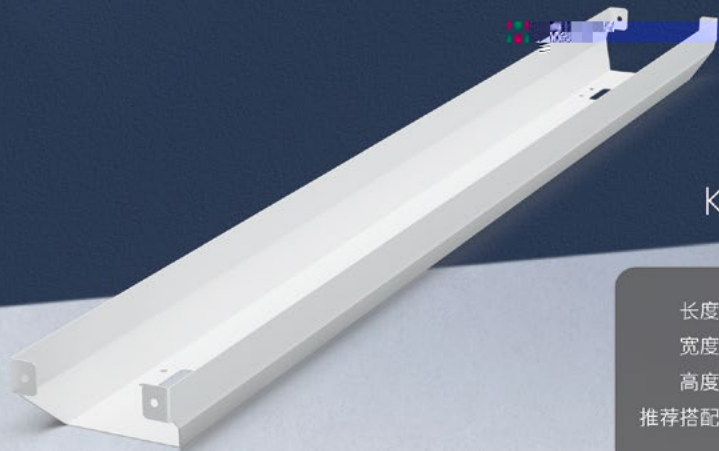

KDXC004

长度 1430 mm
宽度 150 mm
高度 74.64 mm
推荐搭配 Sole Dual



KDXC004-1

1000 mm
148 mm
100 mm

Sole



KDXC005

1130/1309 mm
200 mm
100.2 mm
166 mm

Dual



KDXC005-5

943-1393 mm
206 mm
112.2 mm
166 mm

Dual

Variable

Trio



KDXC008

1008/1208/1408/1608/1808 mm
204 mm
108.5 mm
166 mm

Dual

Variable

Trio



KDXC012

850-1450 mm
153 mm
116 mm
90 mm

Dual



KDXC013-2

852-1460 mm
215 mm
105 mm
166 mm

Variable

Trio



KDXC017

852-1460 mm
230 mm
96.5 mm
176 mm

Dual

Variable

Trio



1080 mm
47 mm
24 mm

Sole

Dual

Variable

Trio



